


Guarnizioni in elastomero | Tenuta Stelo S01 Pneumatica

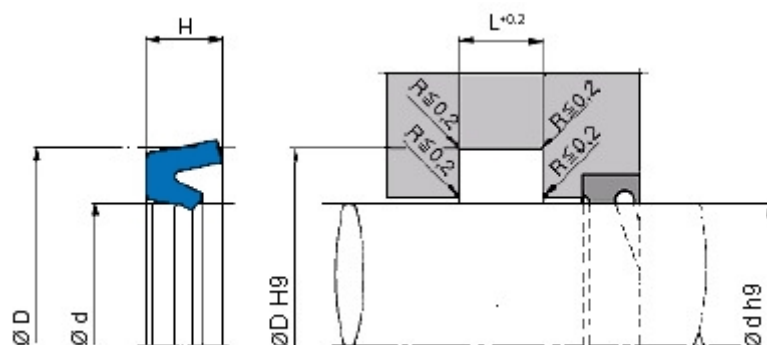

Materiale: P95-R198.

Pressione max. 160 bar.

Temp.di esercizio: -30 +105°C.

Velocita' max. 0.5 m/sec.

Materiale: N85-N116.

Pressione max 100 bar.

Temp.di esercizio: -25 +100°C.

Velocita' max. 0.5 m/sec.



SEDI

d f9 stelo	D H9 fondo gola	H ingombro	L +0.2 larghezza gola	codice
3	7	3	3.5	S01 003x007x3.5 P95-R198
3	9	4.5	5	S01 003x009x5.0 P95-R198
3	10	5	5.5	S01 003x010x5.5 P95-R198
5	9	2.5	3	S01 005x009x3.0 P95-R198
5	12	4.5	5	S01 005x012x5.0 P95-R198
6	10	3	3.5	S01 006x010x3.5 P95-R198
10	13.6	2.3	2.7	S01 010x13.6x2.7 P95-R198
10	16	4.5	5	S01 010x016x5.5 P95-R198
10	18	5.5	6	S01 010x018x6.0 P95-R198
11	17	4	4.5	S01 011x017x4.5 P95-R198
14	22	5.5	6	S01 014x022x6.0 P95-R198
15	22	5	5.5	S01 015x022x5.5 P95-R198
16	22.5	4.5	5	S01 016x22.5x5.0 P95-R198
16	23.5	5.5	6	S01 016x23.5x6.0 P95-R198
16	24	5.5	6	S01 016x024x6.0 P95-R198
18	25	5.5	6	S01 018x025x6.0 P95-R198
18	26	5.5	6	S01 018x026x6.0 P95-R198
20	26	4.8	5.3	S01 020x026x5.3 P95-R198
22	29	5.5	6	S01 022x029x6.0 P95-R198
22	30	5.5	6	S01 022x030x6.0 P95-R198
24	32	5.5	6	S01 024x032x6.0 P95-R198
25	32	5.5	6	S01 025x032x6.0 P95-R198
25	33	5.5	6	S01 025x033x6.0 P95-R198
26	36	7	7.5	S01 026x036x7.5 P95-R198
28	36	5.5	6	S01 028x036x6.0 P95-R198
30	38	5.5	6	S01 030x038x6.0 P95-R198
30	38	8	8.5	S01 030x038x8.5 P95-R198
30	40	7	7.5	S01 030x040x7.5 P95-R198
30	42	8.5	9.5	S01 030x042x9.5 P95-R198
32	40	5.5	6	S01 032x040x6.0 P95-R198
32	42	7	7.5	S01 032x042x7.5 P95-R198
35	43	8	8.5	S01 035x043x8.5 P95-R198
40	48	5.5	6	S01 040x048x6.0 P95-R198
40	48	8	8.5	S01 040x048x8.5 P95-R198
40	50	7	7.5	S01 040x050x7.5 P95-R198



44	54	7	7.5	S01 044x054x7.5 P95-R198
50	60	7	7.5	S01 050x060x7.5 P95-R198
55	65	7	7.5	S01 055x065x7.5 P95-R198
56	66	7	7.5	S01 056x066x7.5 P95-R198
63	75	8.5	9.5	S01 063x075x9.5 P95-R198
65	77	8.5	9.5	S01 065x077x9.5 P95-R198
68	80	8.5	9.5	S01 068x080x9.5 P95-R198
70	82	8.5	9.5	S01 070x082x9.5 P95-R198
80	92	8.5	9.5	S01 080x092x9.5 P95-R198
85	97	8.5	9.5	S01 085x097x9.5 P95-R198
90	102	8.5	9.5	S01 090x102x9.5 P95-R198
100	115	10	11	S01 100x115x11 P95-R198
105	120	10	11	S01 105x120x11 P95-R198
110	125	10	11	S01 110x125x11 P95-R198
120	135	10	11	S01 120x135x11 P95-R198
150	170	14	15	S01 150x170x15 P95-R198
210	230	14	15	S01 210x230x15 P95-R198
260	290	21	22	S01 260x290x22 P95-R198

ALTRI ALLOGGIAMENTI a SEZIONE STANDARD			
Image			
d h9 campo dimensionale	D H9 fondo gola	H ingombro	L +0.2 larghezza gola
3 - 10	d + 4	3	3.5
4 - 15	d + 5	3.5	4
4 - 20	d + 6	4.5	5
4 - 20	d + 7	5	5.5
4 - 50	d + 8	5.5	6
6 - 50	d + 10	7	7.5
15 - 80	d + 11	8	8.5
20 - 150	d + 12	8.5	9.5
40 - 200	d + 15	10	11
50 - 200	d + 16	11	12
80 - 250	d + 20	12	13
80 - 300	d + 20	14	15
150 - 1000	d + 30	21	22
ULTERIORI ALLOGGIAMENTI FORNIBILI A RICHIESTA			