


Guarnizioni Parker Seals |Parker KR tenuta pistone



Materiale: [P5062](#) / [NB078](#)
 Pressione max. 300 bar.
 Temp. di esercizio: -35 +110 °C.
 Max. velocita' 0.5 m/sec.

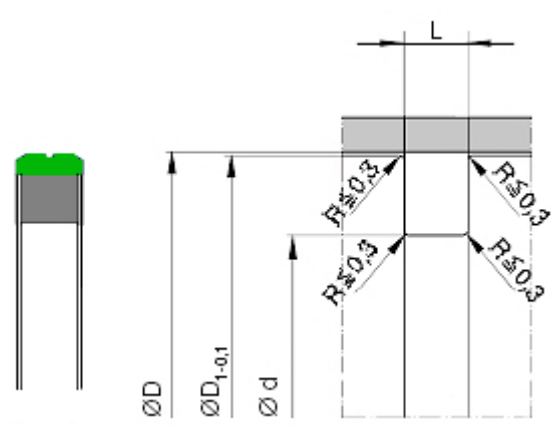

SEDI

DIMENSIONI UNIFICATE ISO 7425/1				
D H9 alesaggio	d h9	L +0.2	D ₁	codice
20	12.5	3.2	19.7	KR 0020 00701
25	17.5	3.2	24.7	KR 0025 00701
32	24.5	3.2	31.7	KR 0032 00701
40	29	4.2	39.7	KR 0040 00701
50	39	4.2	49.7	KR 0050 00701
60	49	4.2	59.7	KR 0060 00701
63	52	4.2	62.7	KR 0063 00701
70	59	4.2	69.7	KR 0070 00701
80	64.5	6.3	79.6	KR 0080 00701
90	74.5	6.3	89.6	KR 0090 00701
100	84.5	6.3	99.6	KR 0100 00701
125	109.5	6.3	124.6	KR 0125 00701
140	119	8.1	139.5	KR 2140 00701
160	139	8.1	159.5	KR 0160 00701
180	159	8.1	179.5	KR 0180 00701
200	179	8.1	199.5	KR 0200 00701